


12/23/99

Type a plus sign (+) inside this box --> ☐

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY  
PATENT APPLICATION  
TRANSMITTAL

Only for new nonprovisional applications under 37 C.F.R. § 1.53(b)

Attorney Docket No. AMED 056

First Inventor or Application Identifier Walid Aboul-Hosn, et al

Title Apparatus and Methods For Entering Cavities Of The Body

Express Mail Label No. EL514049356US

PTO/SB/05 (4/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington DC 20231

1. ☒ Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 38]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 15]
4. Oath or Declaration [Total Pages 53]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- Small Entity ☐ Statement filed in prior application, Status still proper and desired
13. ☒ Statement(s) (PTO/SB/09-12) ☐ Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: \_\_\_\_\_

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment-

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP)

of prior application No: 09,099,713

Prior application Information - Examiner

Bianco, Patricia

Group / Art Unit- 3762

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	A-MED SYSTEMS, INC.				
	attn: Intellectual Property				
Address	2491 Boatman Avenue				
City	West Sacramento	State	California	Zip Code	95691
Country	USA	Telephone	916-375-7400	Fax	916-375-7444

Name (Print/Type)	Jonathan Spangler	Registration No (Attorney/Agent)	40,182
Signature		Date	12/23/1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**STATEMENT CLAIMING SMALL ENTITY STATUS**  
**(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)

AMED 056

Applicant, Patentee, or Identifier: Walid Aboul-Hosn, et al

Application or Patent No.: Enclosed herein

Filed or issued: 12/23/1999

Title: Apparatus and Methods For Entering Cavities Of The Body

I hereby state that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below-

NAME OF SMALL BUSINESS CONCERN A-MED SYSTEMS, INC.

ADDRESS OF SMALL BUSINESS CONCERN 2491 Boatman Avenue  
West Sacramento, CA 95691

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below~

- ☒ no such person, concern, or organization exists.  
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING John Gonzales

TITLE OF PERSON IF OTHER THAN OWNER Vice President Finance

ADDRESS OF PERSON SIGNING 2491 Boatman Avenue, West Sacramento, CA 95691

SIGNATURE



DATE 12/23/1999

**APPARATUS AND METHODS FOR ENTERING  
CAVITIES OF THE BODY**

**5    CROSS REFERENCE TO RELATED APPLICATIONS**

          This application is a continuation-in-part application of pending U.S. Patent Application No. 09/099,713 filed on June 19, 1998 and claims benefit under Title 35, U.S.C. 119(e) of United States  
10    Provisional Application No. 60/113,727 filed on December 23, 1998 entitled " Cannula Assembly Having Bend Distal Tip and Methods of Use."

**FIELD OF THE INVENTION**

          The present invention is directed to  
15    related apparatus systems, equipment and methods for entering cavities of the body.

**BACKGROUND OF THE INVENTION**

          The current trend in medicine is to perform less invasive procedures so as to minimize the  
20    trauma to the patient and shorten the recovery period. A major emphasis is to make as few incisions and as small of an incision as is possible to gain access to the interior of the patient. One area of medicine in which these techniques are being  
25    used more frequently is in heart surgery. Open heart surgery typically requires significant hospitalization and recuperation time for the patient. While very effective in many cases, the use

of open heart surgery to perform various surgical procedures such as, coronary artery bypass grafting (CABG) is highly traumatic to the patient. In addition, open heart procedures require the use of  
5 cardiopulmonary bypass (CPB) which continues to represent a major assault on a host of body systems.

The CABG procedure generally involves open chest surgical techniques where the patient's chest is cut and retracted to provide access to the heart.  
10 During surgery the heart is stopped, and through the use of CPB blood is diverted from the lungs to an artificial oxygenator. In general, a source of arterial blood is then connected to a coronary artery downstream from the occlusion. The source of  
15 blood is often an internal artery, and the target coronary artery is typically among the anterior or posterior arteries which may be narrowed or occluded.

The leading cause of morbidity and  
20 disability following cardiac surgery is cerebral complications. At each incision, there is a risk of gaseous and solid micro and macro emboli, and less often perioperative cerebral hypoperfusion, which produce neurologic effects ranging from subtle  
25 neuropsychologic deficits to fatal stroke. Therefore, there is a need to minimize the number and size of incisions.

Open heart surgery is just one area of

medicine, that would benefit from less invasive apparatus and procedures, others include dialysis and laparoscopic surgery just to name a couple.

Two obstacles to performing surgery is the  
5 number of incisions that must be made in various arteries, vessels, ventricles, atriums and cavity walls of the patient and the safe insertion and withdrawal of various devices and elements through those incisions.

10 One application for cannulas involves the augmenting or supplementation of pulmonary blood flow through the beating heart during heart surgery by use of one or more cannulas involved in the intake and return of blood into the circulatory  
15 system. The cannulas interface between the patient's circulatory system and the mechanical pumps that power the argumentation procedure.

When performing cardiac surgery cannulas are placed within the patient's blood stream and  
20 used for inflow and outflow of blood or other fluids. One such bypass circuit would be a cardiopulmonary bypass circuit (CPB), in which an outflow cannula is placed in the patient's right atrium and a return cannula is placed in the aorta.  
25 The outflow cannula can be further connected to an oxygenator, blood filter, or blood heater. Even though there are negative side effects of using on pump bypasses, doctors continue to do so because of

the ease and reliability of establishing the circuit.

Though presently there is a movement away from stopped heart CPB to beating heart surgery.

- 5 The movement to beating heart surgery is hampered by common bypass techniques and equipment. One such problem occurs while performing a coronary artery bypass graft (CABG) on the back side of the heart. In order to access vessels on the back side of the
- 10 heart the surgeon must rotate the heart. Though rotating the heart while the heart is still beating raises new complications that were not present during stopped heart surgery. Many times rotating the beating heart leads to further complications
- 15 such as a decrease in pulmonary pressure which results in a decrease in oxygen content in the patient's blood. Thus many times when a surgeon is performing a graft on the back side of the heart, the heart must be rotated and replaced many times to
- 20 stabilize the patient's blood pressure.

#### **SUMMARY OF THE INVENTION**

- The present invention provides cannula devices which can be inserted through an incision in a body cavity to allow ingress and egress in
- 25 separate cannulas simultaneously through the incision with minimal trauma.

One aspect of the present invention provides a cannula device which has at least two

openings, at least one of which initially is concealed or closed but which, after being inserted through the wall of a cavity (for example, the aorta), can be opened to allow ingress and egress

5 through the two openings simultaneously through the incision in the wall of the cavity. One embodiment provides a cannulation device for access to an interior body region comprising a cannula body having a distal end for insertion through an

10 incision and including first and second interior flow paths to circulate fluid. A conduit communicates with one of the first and second flow paths and extends beyond the distal end of the cannula body to input or outflow fluid at an area of

15 the interior body region spaced from the distal end. A port communicates with the other one of the first and second flow paths to input or outflow fluid at the distal end. A closure assembly on the cannula

body operates in a first condition to close the

20 port, thereby preventing fluid circulation within the cannula body between the first and second flow paths. The closure assembly operates in a second condition to open the port, thereby allowing fluid circulation within the cannula body between the

25 first and second flow paths.

Another aspect of the invention provides a system for circulating blood in a heart. The system comprises a cannula body having a distal end for

insertion through an incision and including first and second interior flow paths to circulate blood. A conduit communicates with one of the first and second flow paths. The conduit is sized to extend, 5 in use, beyond the distal end of the cannula body for passage into a heart chamber, to thereby input or outflow blood from the heart chamber. The conduit includes a preformed, bent region to direct its passage from the distal end into the heart 10 chamber. A port communicates with the other one of the first and second flow paths to input or outflow blood at the distal end.

Another aspect of the invention provides a cannula for access to an interior body region 15 comprising a body defining a lumen having a distal region. The lumen includes a two dimensional configuration, e.g., one or more bends, in the distal region to aid placement of the cannula in the interior body region.

20 Another aspect of the invention provides a system for circulating blood in a heart. The system comprises a cannula body having a first distal tip and a second distal tip for insertion through an incision and including a plurality of interior flow 25 paths to circulate blood. A first conduit is provided in fluid communication with one of the flow paths. The first conduit is sized to extend, in use, beyond the first distal tip of the cannula body



for passage into a heart chamber, to thereby input or outflow blood from the heart chamber. The first conduit includes a preformed, bent region to direct its passage from the first distal end into the heart chamber. A second conduit is provided in fluid communication with one of the flow paths. The second conduit is sized to extend, in use, beyond the second distal tip of the cannula body for passage into another heart chamber, to thereby input or outflow blood from the heart chamber. The second conduit includes a preformed, bent region to direct its passage from the second distal end into the heart chamber. In one embodiment, a dilator and guidewire may be employed to position the second conduit within the left atrium or left ventricle. In either case the guidewire pierces the atrial wall and the dilator expands the opening, thereby allowing the cannula to pass through the atrial septum.

Any aspect of the invention is usable in association with a pump, which operates, in use, to intake fluid and output fluid.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Many objects and advantages of the present invention will be apparent to those skilled in the art when this specification is read in conjunction with the attached drawings wherein like reference numbers are applied to like elements.

FIG. 1 is a cross-sectional view of a cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region to direct passage into a heart chamber and a  
5 closure assembly that opens and closes fluid circulation within the cannula, the closure assembly being shown in the closed condition;

FIG. 2 is a cross-sectional view of the cannula of FIG. 1, with the closure assembly shown  
10 in the opened condition and with a pump attached.

FIG. 3 is a cross-sectional view of the cannula as taken along line 3-3 of FIG. 2;

FIG. 4 is an enlarged cross-sectional view of the inner cannula of FIG. 1;

15 FIG. 5 is an enlarged cross-sectional view of a flange adapter that the cannula shown in FIG. 1 includes;

FIGS. 6 and 7 are enlarged cross-sectional views of another embodiment of a cannula capable, in  
20 use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens and closes fluid circulation within the cannula;

FIGS. 8 and 9 are enlarged cross-sectional  
25 views of another cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens and closes fluid circulation within the cannula;

FIG. 10 is an enlarged cross-sectional view of another cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens  
5 and closes fluid circulation within the cannula;

FIG. 11 is an enlarged cross-sectional view of another cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens  
10 and closes fluid circulation within the cannula;

FIG. 12 is an enlarged cross-sectional view of another cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens  
15 and closes fluid circulation within the cannula;

FIGS. 13 to 15 are enlarged cross-sectional views of another cannula capable, in use, of being inserted through the wall of a cavity, and having a bent distal region and a closure assembly that opens  
20 and closes fluid circulation within the cannula;

FIG. 16 is a side view of a cannula system capable, in use, of being inserted through the wall of a cavity, and having a bent distal region that aids insertion of a cannula into a heart chamber;

FIG. 17 is a sectional view of the cannula system shown in FIG. 16;

FIG. 18 is a cross sectional view taken about line 18-18 of FIG. 1;

FIG. 19 is a side sectional view of the cannula system shown in FIG. 1 after insertion of an obturator;

5 FIG. 20 is a side view of another cannula system capable, in use, of being inserted through the wall of a cavity, and having a bent distal region that aids insertion of a cannula into a heart chamber;

10 FIG. 21 is a cross sectional view about line 21-21 of FIG. 20;

15 FIG. 22 is a side view of another cannula system capable, in use, of being inserted through the wall of a cavity, and having a distal region having multiple bends that aids insertion of a cannula into a heart chamber;

FIG. 23 is a view of a cannula system having a bent distal region inserted into the right heart;

20 FIG. 24 is a side view of another cannula system capable, in use, of being inserted through the wall of a cavity, and having a bent distal region that aids insertion of a cannula into a heart chamber;

25 FIG. 25 is a cross sectional view about line 25-25 of FIG. 9;

FIG. 26 a side view of another cannula system capable, in use, of being inserted through the wall of a cavity, and having a distal region

with resistive wire disposed within the cannula wall to bend the distal region to aid insertion of a cannula into a heart chamber;

FIG. 27 is a side view of the cannula system shown in FIG. 26 after activating the resistive wire to bend the distal region;

FIG. 28 is a side view of another cannula system capable, in use, of being inserted through the wall of a cavity, and having first and second bent distal regions that aid insertion of first and second cannulas into one or more heart chambers;

FIG. 29 is a cross sectional view about line 29-29 FIG. 28;

FIG. 30 is a sectional view of the cannula system as shown in FIG. 28; and

FIG. 31 illustrates a cannula system having a first bent distal region directing a first cannula into the pulmonary artery for right heart support and a second bent distal region directing a second cannula through the atrial septum and into the left atrium for left heart support.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

In a first embodiment of the present invention, a cannula system 120 (FIG. 1) utilizes a concentric double-wall cannula having an outer cannula 123 forming an annular space 24 around a portion of an inner cannula 121. The cannula system

120 can be a conduit for naturally flowing fluid, pressurized fluid, or can be connected to a miniaturized reverse flow pump 124 shown diagrammatically in FIG. 2. The concentric double  
5 cannula system 120 is inserted into a body cavity 22, such as in the wall of the aorta, abdomen, or any body cavity through a single incision such that the inner cannula 121 provides intake for the fluid entering the reverse flow pump 124 and the outflow  
10 of the reverse flow pump feeds into the outer cannula 123, or vice versa.

Referring to FIG. 1, before the double cannula system 120 with flexible inlet conduit 34 attached thereto is inserted through the incision in  
15 the body cavity 22, the inner cannula 121 is moved proximally within the outer cannula 123 so that a seal exists as shown generally at 18 between the distal portion 26 of the flange connector 28 and the outer diameter of the inlet. In this way, the  
20 system is inserted through the incision with a single outside diameter and a concealed or closed flow outlet but which provides maximum fluid flow during operation. As one of ordinary skill will appreciate, the outside diameter depends on the type  
25 of body cavity to be entered and the age and size of the patient. For example, the diameter might be as large as 60 French for abdominal access, 28 French or less for the aorta, 44 French for the right or

left atrium, 12 French for a baby, or even 8 French for pumping blood in a 300 pound male's coronary artery. Once the system is fully inserted into the incision, the inner cannula 121 is moved distally  
5 within the outer cannula 123 to open the flow outlet as shown in FIG. 2. For easy withdrawal, the inner cannula is retracted to close the outlet and the cannula system is withdrawn through the incision. A preferred reverse flow pump 124 is disclosed in  
10 copending U.S. Application Serial No. 08/933,566 filed September 19, 1997, the disclosure of which is incorporated herein by reference. While FIG. 2 illustrates a preferred pump configuration, it is apparent any suitable pump design or configuration  
15 can be used in this invention. For example, the drive motor can be integral with pump 124, as shown diagrammatically, or can be a remote motor (not shown) connected to the pump by a sheathed flexible drive cable (not shown). While the concentric  
20 double cannula system 120 is particularly useful with the reverse flow pump, other commercially available pumps can be used with such a cannula system. For example, other pumps which can be adapted for use in this invention are disclosed in  
25 U.S. Patents 4,625,712, 5,376,114 and 5,695,471, the disclosures of which are incorporated herein by reference.

The pump and cannula system 10 of the first

embodiment can best be understood by reference to the illustration in FIG. 2, which shows the pump 124 diagrammatically and double cannula system 120 in place in the body cavity 22 through a single

5 incision in the wall of body cavity 22 as illustrated. The double cannula system 120 is inserted into the incision such that a cylindrical distal portion 26 of a flange connector 28 (FIG. 5) forms a seal with the wall of the body cavity 22 at

10 the incision. The proximal portion 27 of flange connector 28 receives the distal portion 30 of the outer cannula 123. As will be recognized by one of ordinary skill in the art, it is within the scope of the invention for flange connector 28 to be an

15 integral portion of outer cannula 123 as shown in some of the embodiments discussed below. Flange 29 of flange connector 28 abuts the outer wall of body cavity 22 to improve the seal between the flange connector 28 and the body cavity 22 and for optional

20 purse string anastomosis to prevent fluid loss. In this regard, an inflatable annular balloon (not shown) can be provided around the distal portion 26 of flange connector 28 which can be inflated after the cannula system 120 has been inserted through the

25 incision to form an improved seal along the inner surface of the body cavity. A typical procedure would involve incision, cannulation, opening the concealed port, hemostasis control at the proximal



end, and attachment of the pump.

The annular space 24 between outer cannula 123 and inner cannula 121 allows outflow of fluid from pump 124. The inner cannula 121 has an adapter  
5 portion 32 (FIG. 4) which can be integral with or attached to the inner cannula 121 and flexible inlet conduit 34, which inlet conduit extends along a portion of the length of the body cavity 22 as shown in FIG. 2. The flexible inlet conduit 34 is  
10 illustrated as a right angled conduit and the flange connector 28 is illustrated as being, inserted perpendicular to the body cavity but it is within the scope of the invention for the flange connector to enter the body cavity at an angle less than 90  
15 degrees and for the flexible inlet conduit to have a more gradual bend rather than a 90 degree bend. The adapter portion 32, best seen in FIG. 4, has an enlarged cylindrical distal end 36 mating the inlet conduit 34 to the adapter portion. The cylindrical  
20 distal end 36 tapers down internally and externally along section 38 to generally cylindrical section 40. The internal reduction in section 38 reduces the inner diameter of the inlet conduit 34 down to the inner diameter of the generally cylindrical section 40. The internal reduction in section 38 reduces  
25 section 40 to funnel the fluid flow into inner cannula 121. The adapter portion 32 has a constant inner diameter along substantially all of the length of generally cylindrical section 40 which then

flares open to a larger inner diameter at the proximal end 37 of the adapter 32 to mate with the larger, relatively speaking, inner diameter of the inner cannula 121. Section 40 of the adapter 32 is  
5 described as being generally cylindrical rather than strictly cylindrical because the outside diameter of section 40 increases gradually from about the vanes 42 to its proximal end 37. Vanes 42 act to center the adapter portion 32 and thus inner cannula 121 in  
10 the flange connector 28 and outer cannula 123 while allowing blood to pass from annular space 24 into aorta 22 as shown in FIGS. 2 and 3. Each of the elements have been shown and described as being generally cylindrical but it is within the scope of  
15 the invention that those elements be elliptical or other shapes. The double cannula for intake and output can have any desired configuration, such as side-by-side cannulas, multi-cannula tubing, axially offset cannulas (FIGS. 6 and 7), and others which  
20 will be apparent to one skilled in the art.

FIGS. 8 and 9 are enlarged cross-sectional views of a third embodiment of the present invention that provides the same benefit of easy insertion and withdrawal of a single outside diameter and  
25 concealed port as described above. The flange connector 128 has at least one but preferably three openings 44 (only 1 shown) through its wall at distal end 26. Flange connector 128 has a

corresponding number of seal flaps 46 which initially cover corresponding openings 44 for insertion (and withdrawal) of the cannula system through the incision in the body cavity. An  
5 actuator 48 (e.g., NITINOL shape memory alloy wire) is located in a slot in the flange connector 128. After the cannula system is inserted into the body cavity 22, the actuator 48 is pushed into the slot in the seal flap 46 to open the outlet 44 and seal  
10 alone, the inner wall of the body cavity. FIG. 10 is an embodiment very similar to the third embodiment of FIGS. 8 and 9 except that the conduits are offset similar to FIGS. 6 and 7 and the flap 146 slides proximally to expose the outlet.

15 Two more embodiments that are similar are shown in FIGS. 11 and 12. The fifth embodiment shown in FIG. 11 has a balloon 51 located at the distal end 26 of the outer cannula 123 which when inflated as shown occludes the opening, to form the seal  
20 shown generally at 18 between the inner and outer conduit. When inflated for insertion, the balloon 51 provides a smooth rounded outer surface for inserting through an incision. The balloon can be attached to the outer cannula 123 or the inner  
25 cannula 121. In the sixth embodiment shown in FIG. 12, the outer diameter of the inner conduit 121 (which extends beyond the distal end 26 of the outer conduit 123) is shaped to provide a smooth

transition with the inflated balloon 51

The seventh embodiment shown in FIGS. 13 - 15 has two outer cannulas 62 and 64. The outermost cannula 64 slides over the cannula 62 with the opening, 66 in cannula 62 initially being offset from opening 68 in cannula 64 as shown in FIGS. 14 and 15. The outermost cannula 64 and cannula 62 are slid over the inner cannula 121 until coming in contact with the outer diameter of the inner cannula as shown in FIG. 15 to form a seal therebetween. The cannula system 70 is inserted into a body cavity with the two openings 66 and 68 misaligned. The outermost cannula 64 is rotated with respect to the cannula 62 to align the openings 66 and 68 to allow fluid to flow therein or out therefrom.

In a preferred embodiment of the present invention, the longer inner cannula 121 is extended through the aortic valve (not shown) into the left ventricle (not shown) by way of the adapter portion 32 and flexible inlet conduit 34. Insertion of conduit 34 into the left ventricle may be accomplished with use of a guidewire. The length in which conduit 34 extends into the left ventricle depends on the beating or still heart bypass surgery procedures performed and on other factors known by those of ordinary skill in the art. The blood flow from the pulmonary vein (not shown) enters the left atrium (not shown) and is normally pumped through

the left ventricle (not shown) into aorta 22. With the pump and cannula system of this invention, a portion or all of the blood from the left atrium enters pump 124 through the inlet conduit 34 and  
5 inner cannula 121 and is pumped through the annular space between outer cannula 123 and inner cannula 121 into the aorta 22 to assure the maintenance of adequate aortic blood flow during beating or still heart surgery. The pump and cannula system of the  
10 present invention is capable of maintaining a flow of five liters per minute, and more preferably, seven liters per minute. As will be recognized by one skilled in the art, the above discussed cannulas and conduit will be made of appropriate flexible  
15 bio-compatible materials which have sufficient flexibility, radial stiffness and other strength properties appropriate to the function intended in this invention. In most applications the cannulas and conduit utilized in this invention must have  
20 appropriate radial strength and stiffness to resist collapsing or kinking under the stresses and compressive loads imposed on them when inserted in the appropriate blood vessels during, beating or still heart bypass surgery. In some instances, soft  
25 and flexible materials such as silicones may be desirable and may need to be reinforced with wire or other material to provide the radial stiffness and resistance to collapsing necessary to be useful in

the present invention.

The pump(s) of the systems of the present invention can be controlled in response to conventional parameters, such as oxygen level  
5 measured by conventional means, blood pressure measured by conventional means, or other parameters desired to assure proper patient support during and after surgery.

Another advantage of the system of the  
10 present invention is that the dual cannula in combination with the reverse flow miniature pump, such as disclosed in copending U.S. Application Serial No 08/933,566, enables the installation of the pump essentially adjacent to the incision where  
15 the dual cannula is inserted into the aorta or other appropriate location. Thus, the priming volume of the pump and cannula system is minimized to less than about 1,000 ml, preferably less than about 500 ml, and more preferably less than about 200 ml. In  
20 this context, "priming volume" refers to the volume of the pump and cannula which is external of the patient and does not include the volume of the portions of the cannula and inlet conduit which are inserted into the patient and thus are immersed in  
25 the blood flow. It is especially preferred that the pump and cannula system priming volume be very small, typically less than 30 ml, preferably less than 20 ml, and most preferably less than about 10

ml. In this regard, it is within the scope of the invention and definition of the outer cannula that its length be very short so as to appear as a plug at the incision.

- 5 Another advantage provided by the cannula system of this invention is that, by having the capability of placing the small priming volume pump adjacent to or very near the incision, the distance the blood must travel outside the body is minimized.
- 10 Contact of the blood with tubing, pump components and other apparatuses is minimized, therefore the pump can operate essentially at body temperature. This eliminates the necessity of cooling or warming the blood, particularly because the blood is outside
- 15 the body a very short distance and for a very short time. With this system the entire cannula system can be positioned near the chest cavity, within the chest cavity itself, near or adjacent to the heart to obtain the minimum possible pumped blood flow
- 20 path. Other advantages include the fact that with the cannula system miniaturized and configured to be contained in the chest cavity, this system eliminates the disadvantages of having numerous tubes, cables, etc., extending from the patient's
- 25 chest cavity to external equipment. In the preferred embodiment of the present invention, the only line extending from this system to external equipment is a single cable from the pump to the

external power supply for providing power to the pump. This single cable may contain an electrical connection for supplying electrical power to the pump motor near the heart or may be a flexible drive  
5 cable for transmitting power from a remote motor to the pump in or near the heart. Thus, the cannula system of this invention provides the surgeon better surgical access to the heart and visibility of the heart by eliminating the CPB tubing and other  
10 associated cables and pumps which are conventionally used in bypass surgery.

Another advantage of the present invention is that the fluid in the outer cannula acts as a safety feature preventing air from being drawn into  
15 the body cavity. If the inner cannula was not drawing fluid, rather than pulling air in around the distal end 26 of the flange adapter, the system would draw the fluid from the annular space 24 into the body cavity to prevent embolism. As will be  
20 apparent to one skilled in the art, the above description of the cannula system and reverse flow pump having a minimum priming volume constitute preferred embodiments of the present invention, but other pump and cannula configurations and designs  
25 may be employed in the cannula systems of the present invention. For example, an inner cannula may be inserted to draw fluid into an in-line pump which can then return the fluid through a looped



conduit back to the outer cannula. Thus, various conventional pumps can be used in accordance with the cannula systems of this invention, even those of large priming volume.

5           Another embodiment of the present invention provides a cannula assembly which has been specifically adapted for insertion within the patient's heart. The cannula assembly allows, for example, the user to insert a first outer cannula  
10 into the right atrium and advance the distal tip of the first outer cannula into the right ventricle. The distal tip of the first cannula is curved, to guide a second inner cannula through the first cannula and advance the second cannula into the  
15 pulmonary artery. After placing the second cannula through the first cannula and into the pulmonary artery, a blood pump can be attached to the proximal end of the cannula assembly. Thereafter the pump and cannula assembly may be utilized to provide  
20 support to the right side of the beating heart.

          The cannula assembly comprises a substantially tubular, semi-flexible material adapted for fluid transport while inserted in a patient's body, and is provided with a curved distal  
25 tip or guide tube. The cannula assembly may further be adapted to support a stiffening wire to aid the operator in its insertion through the patient's body, and/or a light source to provide a visual reference

during the insertion procedure. Further the cannula assembly may contain lumens disposed within the wall of the cannula, these lumens may be utilized to inflate or deflate balloons disposed about the outer surface of the cannula, or alternatively at least one pressure transducer may be disposed sufficiently closed to the main lumen of the cannula for pressure measurements. Still further, the cannula assembly may contain more than one pressure transducer disposed adjacent to the inner wall, thereby allowing the user to determine a flow rate within the cannula.

An exemplary arrangement of such a cannula assembly 210 is shown in FIGS. 16 to 19. The cannula assembly 210 comprises a substantially cylindrical structure having main tube 220 with wall 218 defining a main lumen 211, an inflow port 230, and a formed curved portion 240. Wall 218 can be formed of materials ranging from rigid too flexible, and in the preferred embodiment comprises a semi-rigid transparent material such as polyurethane, polyvinyl chloride (PVC) or other material. Lumens other than main lumen 211 may also be provided, as described below.

To lend structural support, spiraling wire (not shown) may be provided for reinforcement, which is generally molded into the wall 218 of cannula assembly 210. The wire further facilitates handling

of cannula assembly 210 and reduces the possibility of cannula assembly 210 collapsing or being pinched shut and thus closing off the flow of fluid to or from the patient or preventing the user from passing  
5 a inner cannula through lumen 211 of cannula assembly 210. Other ways of reinforcing the tubular body of cannula assembly 210 are known in the art and will adapt equally well to the present invention. In addition, no reinforcement may be  
10 needed if the cannula material is sufficiently rigid or if sufficient fluid pressure is present within the cannula. The pitch in which the wire is wound within cannula wall 218 can be altered to vary the stiffness of cannula assembly 210. By altering the  
15 winding pitch during the manufacturing process the stiffness of curved portion 240 can be altered. Thus the curved portion 240 may be formed so that it is sufficiently stiff to provide the user with the ability to align distal tip 241 with the patient's  
20 pulmonary artery so that a second cannula may be passed through lumen 211 and into the pulmonary artery. Still, the curved portion 240 must be sufficiently flexible such that when the heart is rotated curved portion 240 will deflect or rotate  
25 with the heart. Alternatively, the curved portion 240 may not be reinforced with wire.

As illustrated in FIGS. 16 to 22, cannula assembly 210 is constructed by combining main body

220, the inflow port 230, and the curved portion 240. Inflow port 230 may be molded of polyurethane, or polyvinyl chloride, although most preferably inflow port 230 is constructed of urethane. As  
5 illustrated in FIGS. 16 and 17, inflow port 230 contains openings 232, distal end 231, and proximal end 233. Proximal end 233 of inflow port 230 is adapted to receive distal end 221 of tube 220 of cannula assembly 220. Distal end 231 of inflow port  
10 230 is adapted to receive proximal end 243 of curved portion 240.

The curved portion 240 may be constructed of materials ranging from rigid too flexible, and in the preferred embodiment comprises a semi-rigid  
15 transparent material such as polyurethane, polyvinyl chloride or other material. Further, curved portion 240 may contain apertures 245 disposed adjacent to distal tip 241 and along the length of the curve. Distal tip 241 is preferably formed sufficiently  
20 smooth such that tissue will not be damaged if contacted. Distal tip 241 is further adapted to provide a seal about cannula 260 when cannula 260 is disposed through tip 241 (see FIG. 23). Curved portion 240 and distal tip 241 may be constructed of  
25 different materials that are then bonded together through the use of solvents or heat. Curved portion 240 may be constructed having varied wall thickness. Further curved portion 240 may be constructed of a

material having a different durometer than distal tip 241.

As illustrated in FIGS. 16 and 20, distal tip 241 may be constructed of a similar material as the curved portion 240 though of a different durometer. Tip 241 may be constructed of a more resilient material than curved portion 240 such that if tip 241 contacts the patient's tissue it will not abrade the patient's tissue thereby causing further damage.

As illustrated in FIG. 19, prior to insertion into the patient's body, cannula 210 may be equipped with a flexible obturator 270 disposed within main lumen 211. Distal tip 271 of obturator 270 is adapted to seal inflow port 242 during insertion and to provide a smooth transition between distal tip 271 of obturator and distal tip 241 of cannula assembly 210. Proximal end 272 of obturator 270 further contains handle 273. During assembly handle 273 of obturator 270 is placed such that when obturator 270 is fully inserted within cannula assembly 210, distal tip 271 seals inflow port 242 of distal tip 241 of cannula assembly 210. Placement of handle 273 further ensures that distal tip 271 of obturator 270 does not protrude substantially beyond distal tip 241 of cannula assembly 210.

As illustrated in FIGS. 20 and 21, cannula

310 may be constructed as a unitary construction having a smooth inner and outer surface. It may also be constructed of a soft, resilient material, such as urethane, though preferably constructed of polyvinyl chloride (PVC). Cannula 310 may further include spiral wire reinforcement (not shown) disposed within the cannula wall, further cannula 310 may contain malleable material 312 disposed within wall 318 of cannula 310. Malleable material 312 allows the cannula to be shaped into a desired form before inserting cannula 310 into the patient. Cannula 310 may be manufactured by a dip-molding process utilizing a mandrel as an inner mold.

Alternatively, as illustrated in FIG. 22, cannula assembly 300 may contain more than one curved portion 340, 347 within one or more planes. Therefore, cannula assembly 300 is bent in at least two directions. Curved portions 340, 347 aid the user in aligning distal tip 341 with the patient's right ventricle or pulmonary artery.

In use, as illustrated in FIG. 23, cannula assembly 210 is inserted within the patient's body through the right atrium. Distal tip 241 of cannula assembly 210 is disposed within the patient's right ventricle by advancing cannula assembly 210 through the right atrium and tricuspid valve. After cannula assembly 210 is placed within the patient's right ventricle, inner cannula 260 is inserted distally

through main lumen 211 of cannula assembly 210.  
Inner cannula 260 is advanced through lumen 211 of  
cannula assembly 210 until distal tip 261 of inner  
cannula 260 is placed within the patient's pulmonary  
5 artery. Curved portion 240 of cannula assembly 210  
aids in placing distal tip 261 of inner cannula 260  
into the patient's pulmonary artery by providing the  
user with a means for advancing inner cannula 260  
without the need for supplemental guiding means,  
10 such as a guidewire or balloon catheter. After  
placing inner cannula 260 within the patient's  
pulmonary artery, cannula 260 is preferably clamped  
near the y-connector 280, thereby restricting  
cannula 260 from moving independent of cannula  
15 assembly 210.

As illustrated in FIGS. 19 and 20, cannula  
assembly 210 may further contain y-connector 280  
disposed about proximal end 214 of cannula assembly  
210. Y-connector 280 contains hemostasis valve 285  
20 disposed about proximal end 281 of y-connector 280.  
Hemostasis valve 285 seals around inner cannula 260,  
thereby allowing the inner cannula to move relative  
to the outer cannula and further reducing the  
possibility of blood leakage or emboli forming  
25 within the patient's blood stream. The y-connector  
280 and hemostasis valve 285 may comprise any number  
of commercially available y-connectors and  
hemostasis valves, inclusive but not limited to the

hemostasis valves of the type shown and described in U.S. Patent Application Serial No. 09/163,102 and U.S. Patent Application Serial No. 09/163,103, owned by the assignee of the present application, the  
5 contents of which are herein incorporated by reference.

A further embodiment of the invention is illustrated in FIGS. 24 AND 25. Cannula assembly 610 consists of a main tube 620, an inflow port 630,  
10 and a curved portion 640. Cannula assembly 610 may also be equipped with lumen 690 disposed axially through wall 618 of main tube 620, inflow port 630, and pre-curved portion 640. Lumen 690 may contain stylet 691 that allows the user to adjust the  
15 curvature of curved tip 640 of cannula assembly 610. Initially stylet 691 is inserted through lumen 690 in cannula wall 618. After placing cannula assembly 610 within the patient's heart, stylet 691 may be removed thereby enabling curved portion 640 of  
20 cannula assembly 610 to become more flexible. Alternatively, curved tip 640 may further contain steering wire fixedly attached within lumen 690 of cannula assembly 610 adjacent to distal tip 641. By manipulating the proximal end of steering wire, the  
25 operator may adjust the curvature of the distal tip 641 of cannula assembly 610.

As illustrated in FIGS. 26 AND 27, distal tip 741 may further contain wire 791 having



resistive joint connections 795 forming a continuous wire. Lumen 790 disposed axially through cannula assembly 710, having electrical wire 796 in communication with wire 791 disposed within distal tip 741 of cannula assembly 710. Proximal end of electrical wire 796 is connected to an adjustable current source. As illustrated in FIG. 27, distal tip of cannula assembly 710 can be selectively curved by passing an electrical signal through electrical wire 796. The electrical signal is passed to wire 791, where selective resistive joints 795 will sever allowing the portion 740 to assume a pre-determined curved shape. Prior to assembly, portion 740 of cannula assembly 710 is formed having a curved portion. Portion 740 further contains lumen 790 through which wire 791 may be disposed, thereby straightening portion 740 for insertion into the patient. After inserting cannula assembly 710 into the patient's right ventricle, a current generator may be activated, thereby severing a selective joint 795, and allowing portion 740 to curve into a pre-determined shape.

An alternative method of selectively bending portion 740, would be to use a memory shape alloy metal such as Nitinol which reacts to changes in temperatures. Therefore, portion 740 of cannula assembly 710 may be formed having an initial curvature. Before insertion into a patient the

cannula is either heated or chilled, thereby activating the Nitinol wire that straightens the cannula for insertion into the patient. After insertion into the patient, the cannula warms to the  
5 temperature of the blood flowing therethrough, thus causing the tip of the cannula to return back to its pre-curved state.

Alternatively, portion 740 of cannula assembly 710 containing Nitinol wire may be  
10 initially formed with a curvature adjacent to distal tip 741. After inserting cannula assembly into the patient's heart, cannula assembly is warmed to body temperature, thereby activating the Nitinol wire which allows curved portion to become flexible.  
15 Thus, if the heart is rotated, curved portion 740 will not resist the rotation of the heart.

An alternative embodiment of the pump and cannula system described above can best be understood by reference to the illustrations in  
20 FIGS. 28-31. Cannula assembly 510 comprises a substantially cylindrical structure having a main tube 520 with wall 518 defining a main lumen 511, at least one inflow port 530, and formed curved portions 540 and 560. As shown in FIG. 28, inflow  
25 port 530 contains a plurality of apertures 533. Proximal end 534 of inflow port 530 is adapted to receive distal end 521 of tube 520 of cannula assembly 510. Distal end 532 of inflow port 530 is

adapted to receive the proximal end 543 of curved portion 540. Curved portion 540 may further contain apertures 545 disposed adjacent inflow port 530 and along the length of curved portion 540. As shown in  
5 FIG. 28, curved portion 560 extends generally from the distal end 521 of cannula body 520.

In use, as illustrated in FIG. 31, cannula assembly 510 is inserted within the patient's heart through the right atrium. Curved portion 540 is  
10 advanced through the atrial valve into the right ventricle and the inflow port 530 is disposed in the right atrium. After placing cannula assembly 510, inner cannula 260 is advanced through lumen 511 and guided by curved portion 540 such that the distal  
15 end 261 of inner cannula 260 is disposed within the pulmonary artery. Curved portion 540 of cannula assembly 510 aids in placing distal tip 261 of inner cannula 260 into the patient's pulmonary artery by providing a guiding function for inner cannula 260.  
20 Blood may then be withdrawn from the right atrium through port 530 by the action of blood pump 2. Blood pump 2 then redirects the blood (withdrawn from the right atrium) through the inner cannula 260 such that it passes out the distal tip 261 for deposit  
25 into the pulmonary artery.

The second curved portion 560 also serves a guiding function, that is, to guide a second inner cannula 270 through the atrial septum such that its

distal tip 271 is disposed within the left atrium. This may be facilitated by first using a stylet (not shown) and a guidewire (not shown) to pierce and expand the atrial septum. In use, blood is  
5 withdrawn from the left atrium through apertures disposed adjacent to the distal tip 271 of second inner cannula 270, into blood pump 3, whereby the blood is expelled from blood pump 3 into the patient's aorta through cannula 580.

10 It will now be apparent to those skilled in the art that various modifications, variations, substitutions, and equivalents exist for various elements of the invention but which do not materially depart from the spirit and scope of the  
15 invention. Accordingly, it is expressly intended that all such modifications, variations, substitutions and equivalents which fall within the spirit and scope of the invention as defined by the appended claims be embraced thereby.

20 We claim:

1. A system for circulating blood in a heart comprising:

25 a cannula body having a distal end for insertion through an incision and including first and second interior flow paths to circulate blood,  
a conduit communicating with one of the first and second flow paths and being sized to

extend, in use, beyond the distal end of the cannula body for passage into a heart chamber, to thereby input or outflow blood from the heart chamber, the cannula body including a first curved portion to  
5 direct passage of said conduit from the distal end into the heart chamber, and

a port communicating with the other one of the first and second flow paths to input or outflow blood at the distal end.

10

2. A system according to claim 1 and further, wherein the cannula body includes a second curved region to direct the passage of a second conduit into a second heart chamber.

15

3. A system according to claim 1, wherein the pump, the first flow path, and the second flow path have a combined a priming volume external of the heart of not greater than about 1000 ml.

20

4. A system according to claim 3, wherein the priming volume is not greater than about 30 ml.

5. A system according to claim 3, wherein  
25 the priming volume is not greater than about 10 ml.

6. A system according to claim 1, further including a pump communicating with the proximal end

of the cannula body and operating to circulate blood through the first and second interior flow paths.

7. A system according to claim 1 further  
5 including a closure assembly on the cannula body operating in a first condition to close the port, thereby preventing blood circulation within the cannula body between the first and second flow paths, the closure assembly operating in a second  
10 condition to open the port, thereby allowing blood circulation within the cannula body between the first and second flow paths.

8. A cannula for access to an interior  
15 body region comprising a body defining a lumen having a distal region, the lumen including a bend in the distal region.

9. A cannula according to claim 8,  
20 wherein the lumen includes a main axis, and wherein the bend is bent at an angle between 0 and 360 degrees relative to the main axis.

10. A cannula according to claim 9,  
25 wherein the angle is between 0 and 270 degrees.

11. A cannula according to claim 9,  
wherein the angle is between 0 and 180 degrees.

12. A cannula according to claim 1,  
wherein the lumen includes first and second bends in  
the distal region.

5 13. A cannula for access to an interior  
body region comprising a body defining a lumen  
having a distal region, the lumen including at least  
a two-dimensional configuration in the distal  
region.

10

14. A cannula according to claim 13  
including deformable flexible wire disposed within  
the body to form the two-dimensional configuration.

15 15. A cannula according to claim 13  
including a memory shape alloy disposed within the  
body to form the two-dimensional configuration.

20 16. A cannula according to claim 13  
including multi segmented wire with resistive  
sensitive connectors disposed within the body to  
form the two-dimensional configuration.

## ABSTRACT OF THE DISCLOSURE

A cannula assembly provides access to an interior body region. The cannula assembly defines a lumen having a distal region. The lumen includes  
5 a bend in the distal region to guide deployment in the body region. A closure assembly can be provided to open and close the cannula assembly to fluid flow.



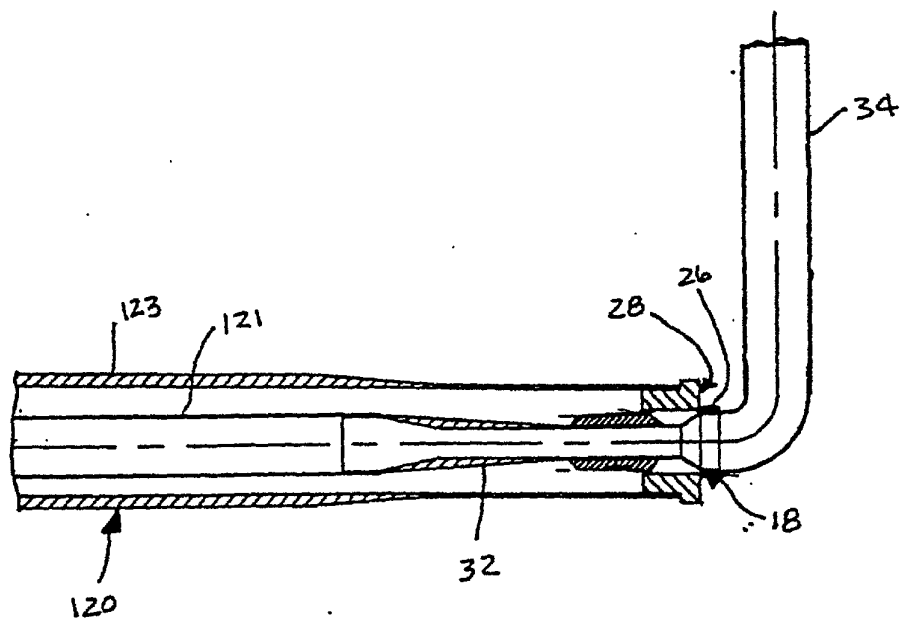


FIG. 1

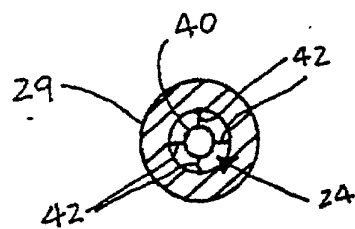


FIG. 3

FIG. 2

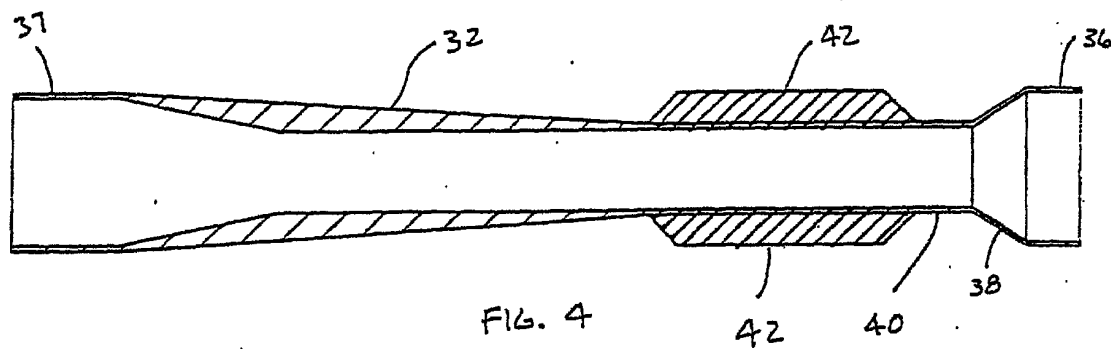
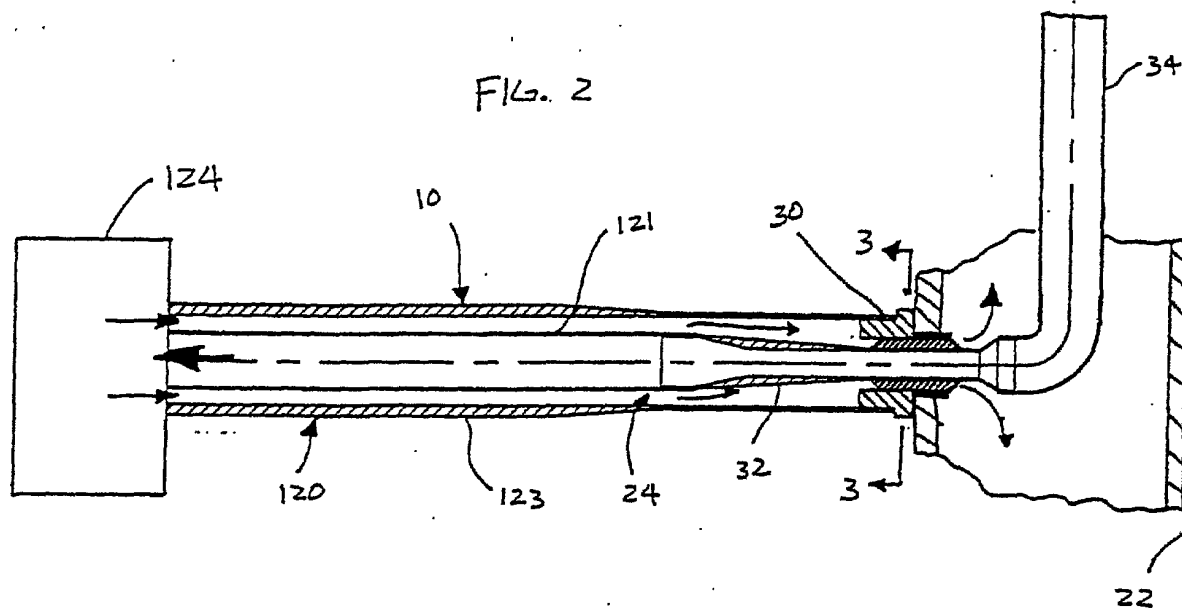


FIG. 4

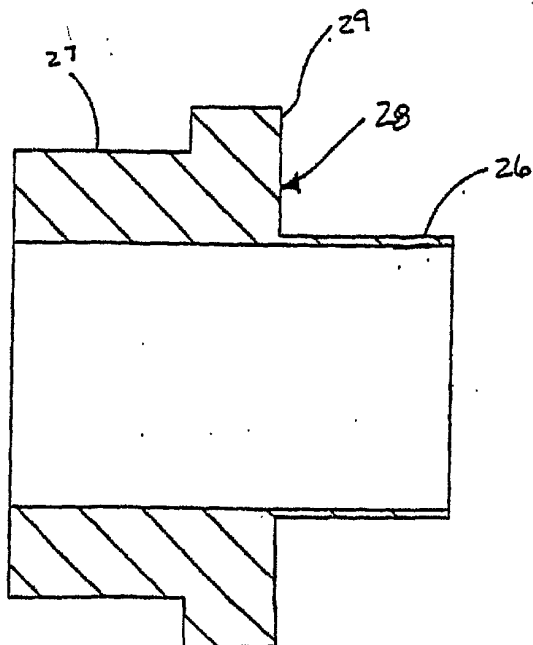


FIG. 5

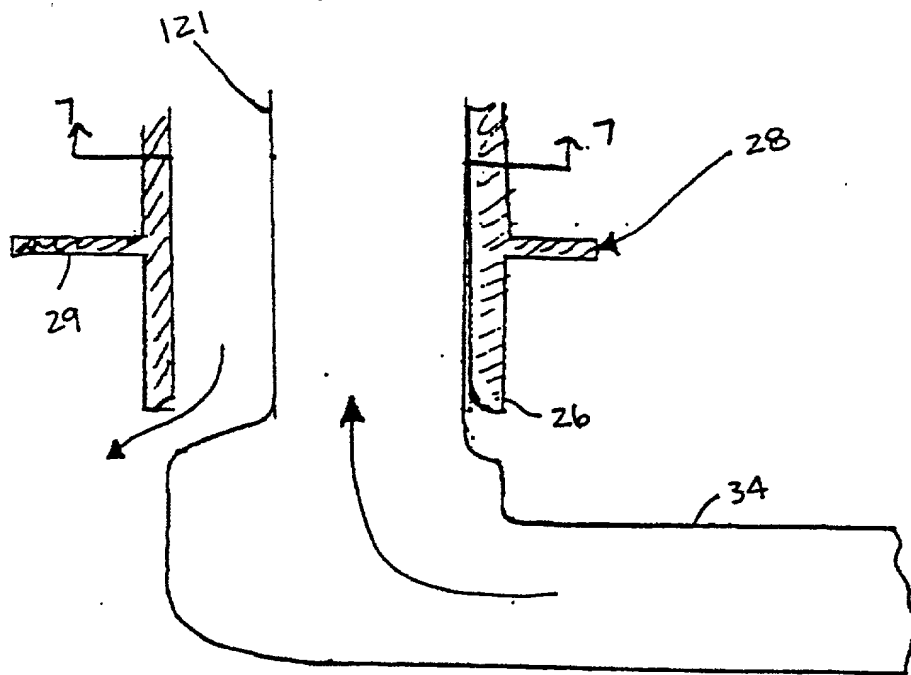


FIG. 6

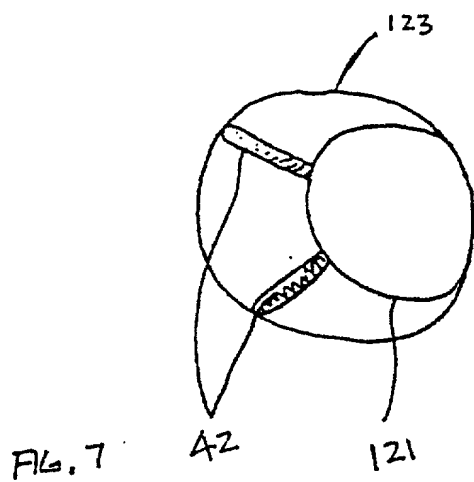


FIG. 7

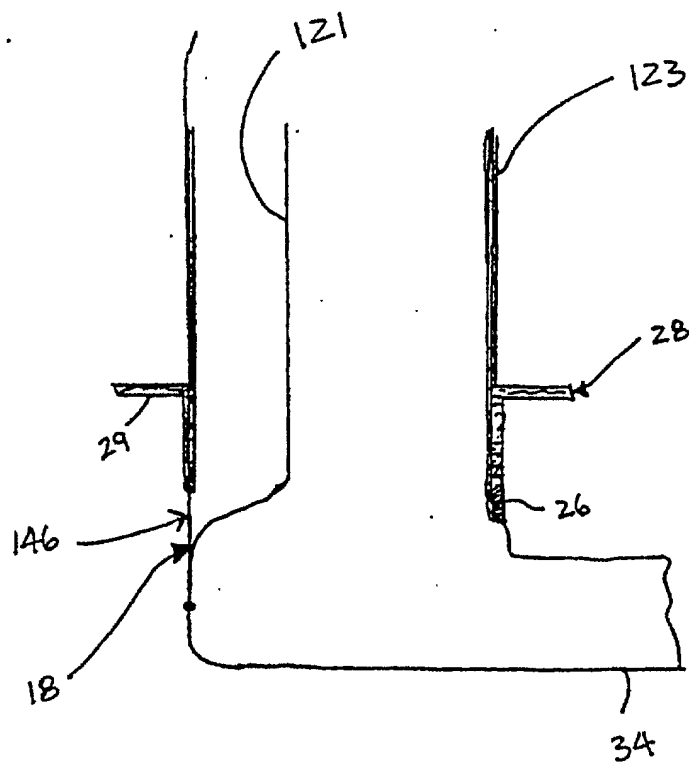


FIG. 10

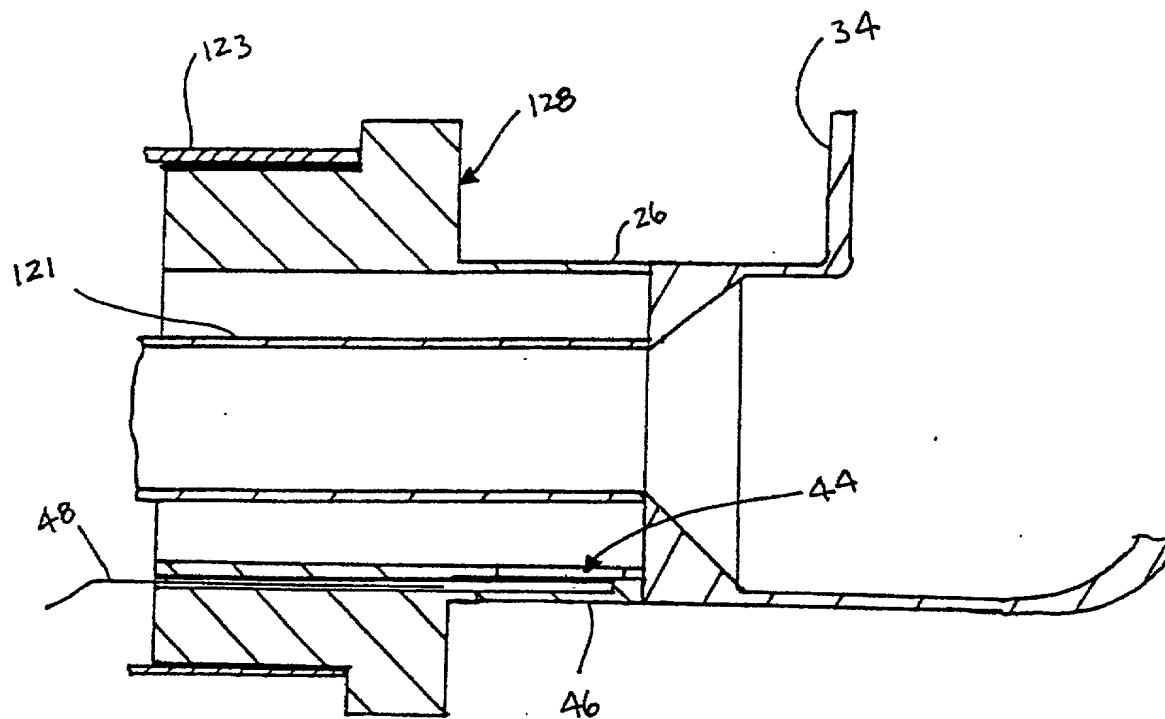


FIGURE 8

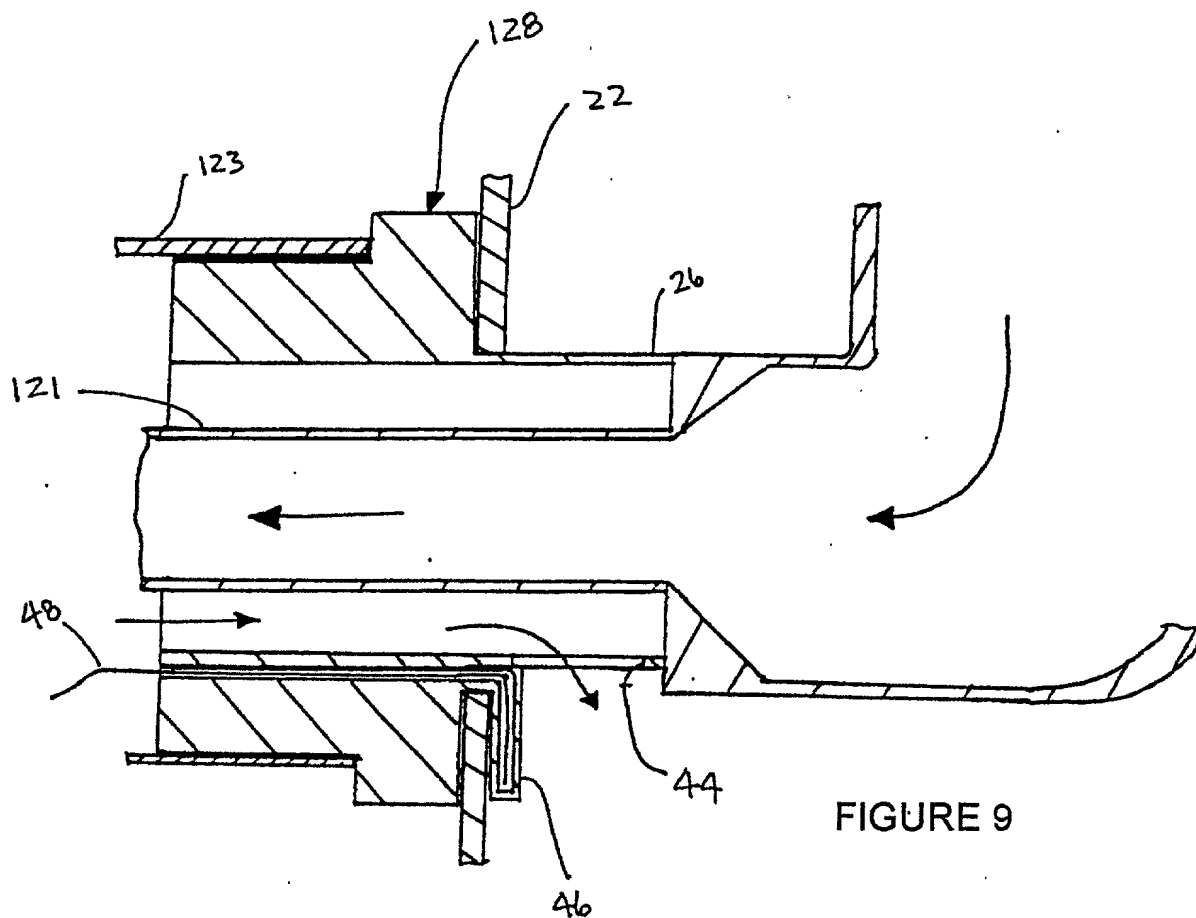


FIGURE 9

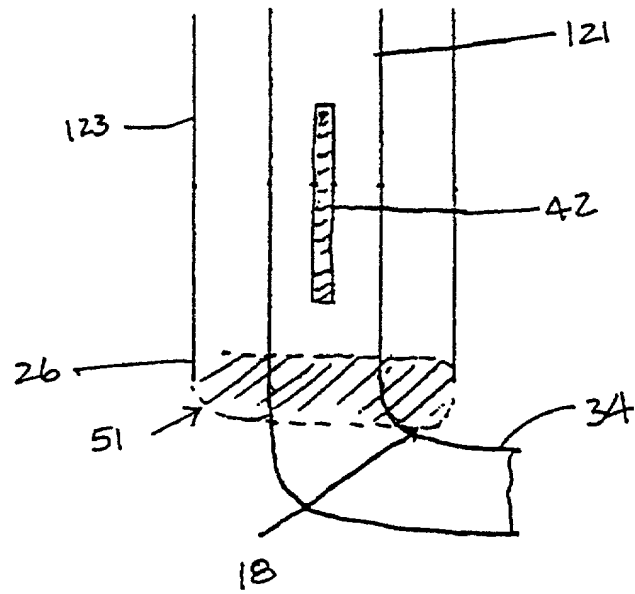


FIG. 11

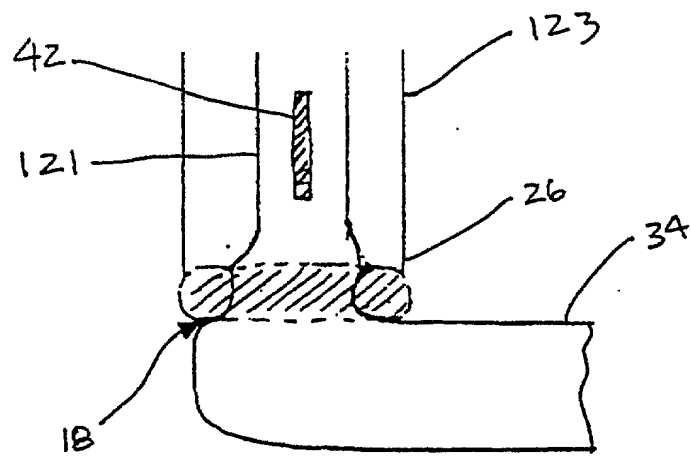


FIG. 12

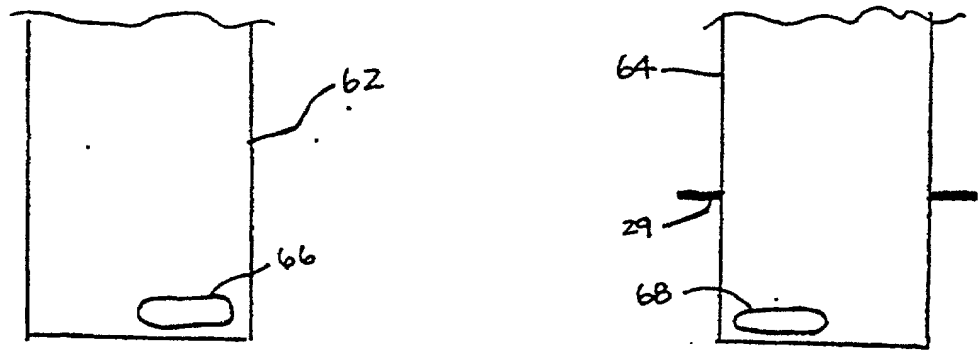


FIG. 13

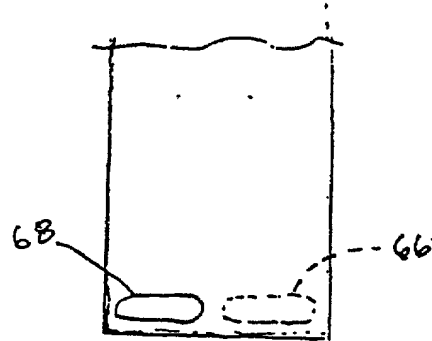


FIG. 14

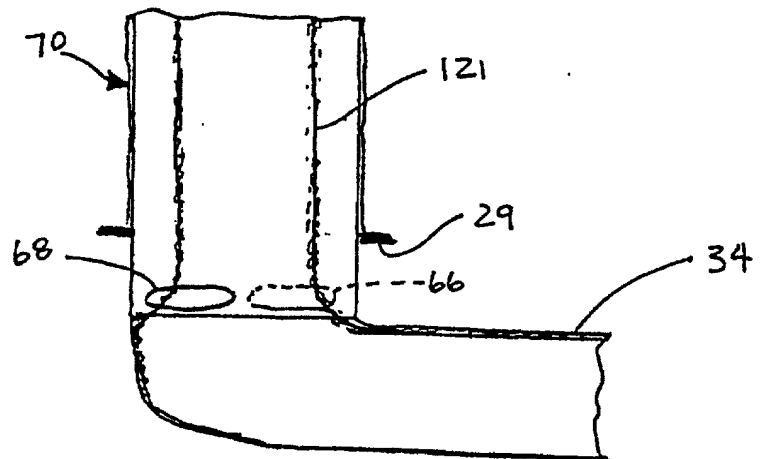


FIG. 15

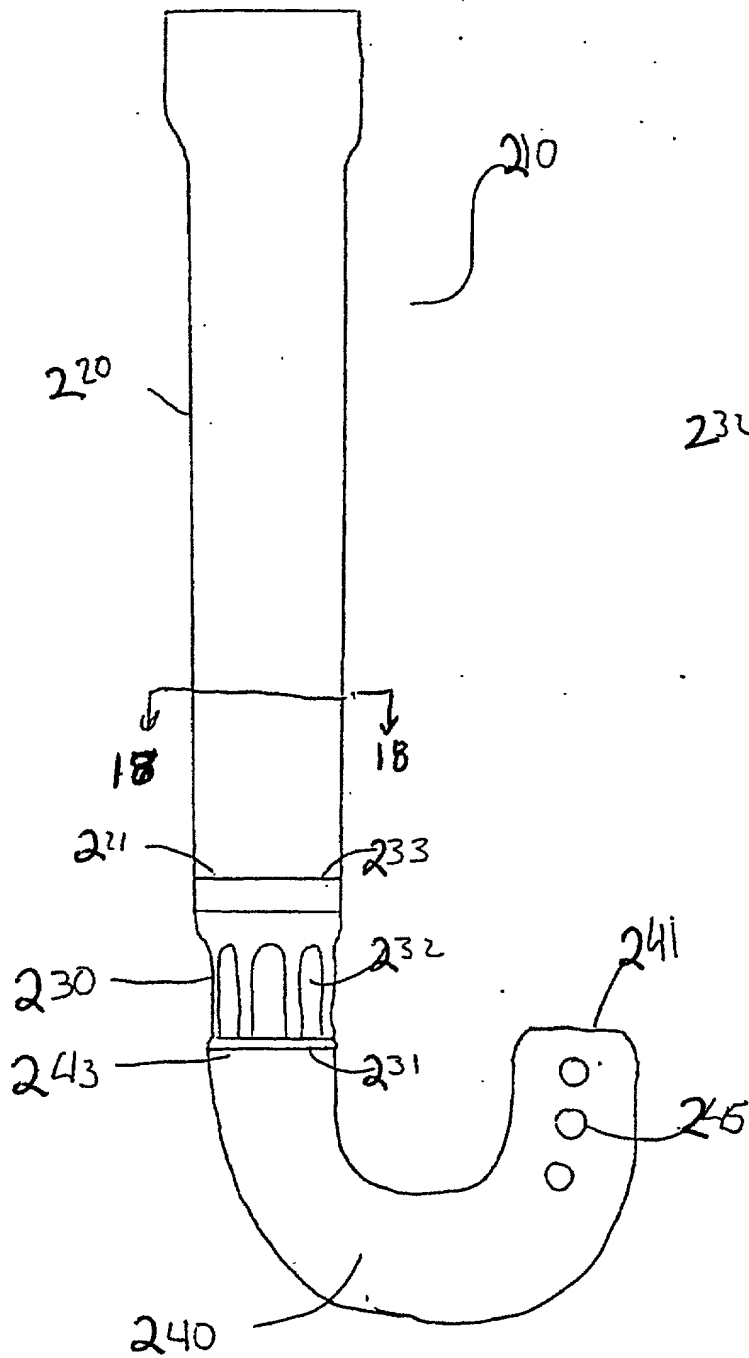


Figure 16

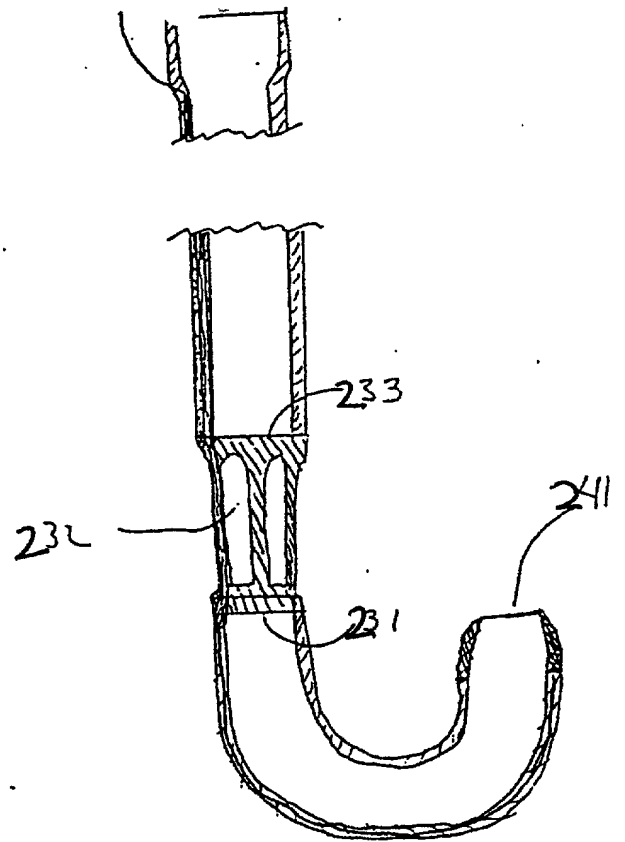


Figure 17




Figure 18

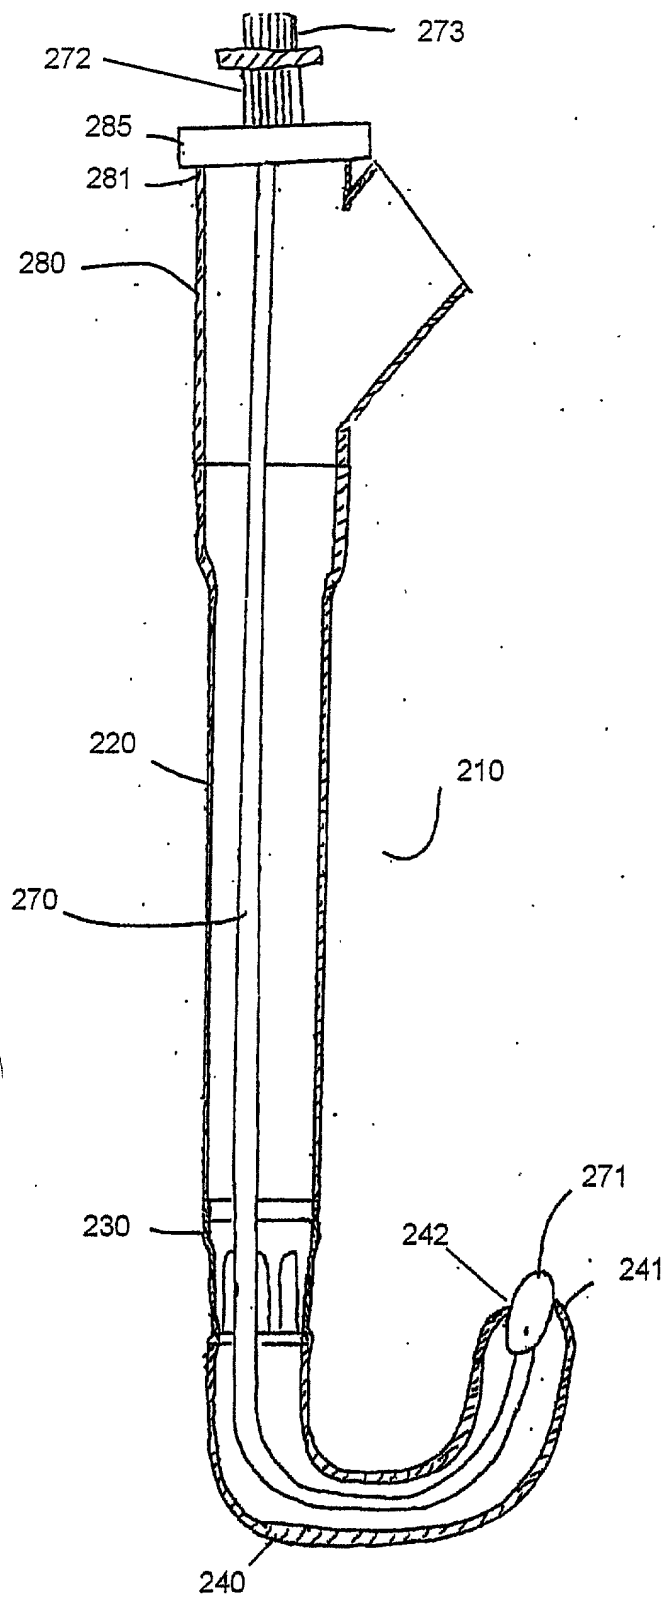


FIGURE 19



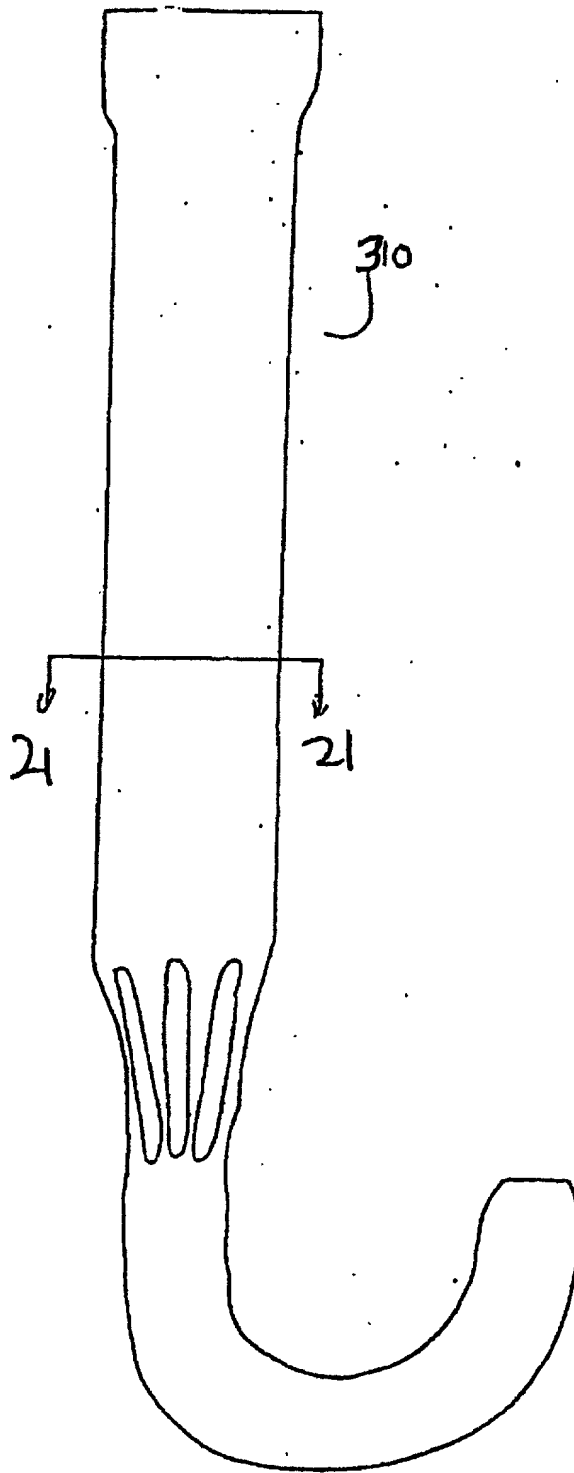


Figure 20

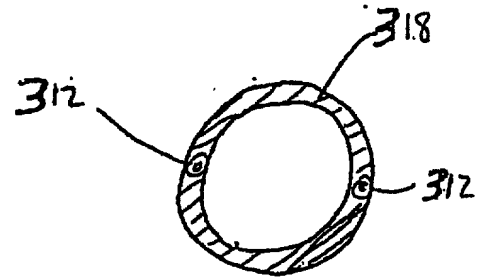


Figure 21

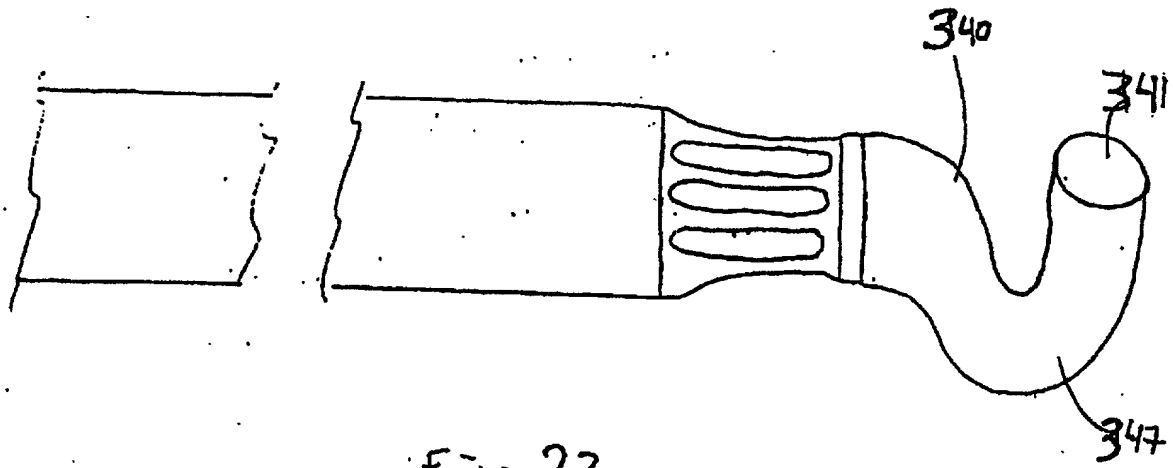


Figure 22

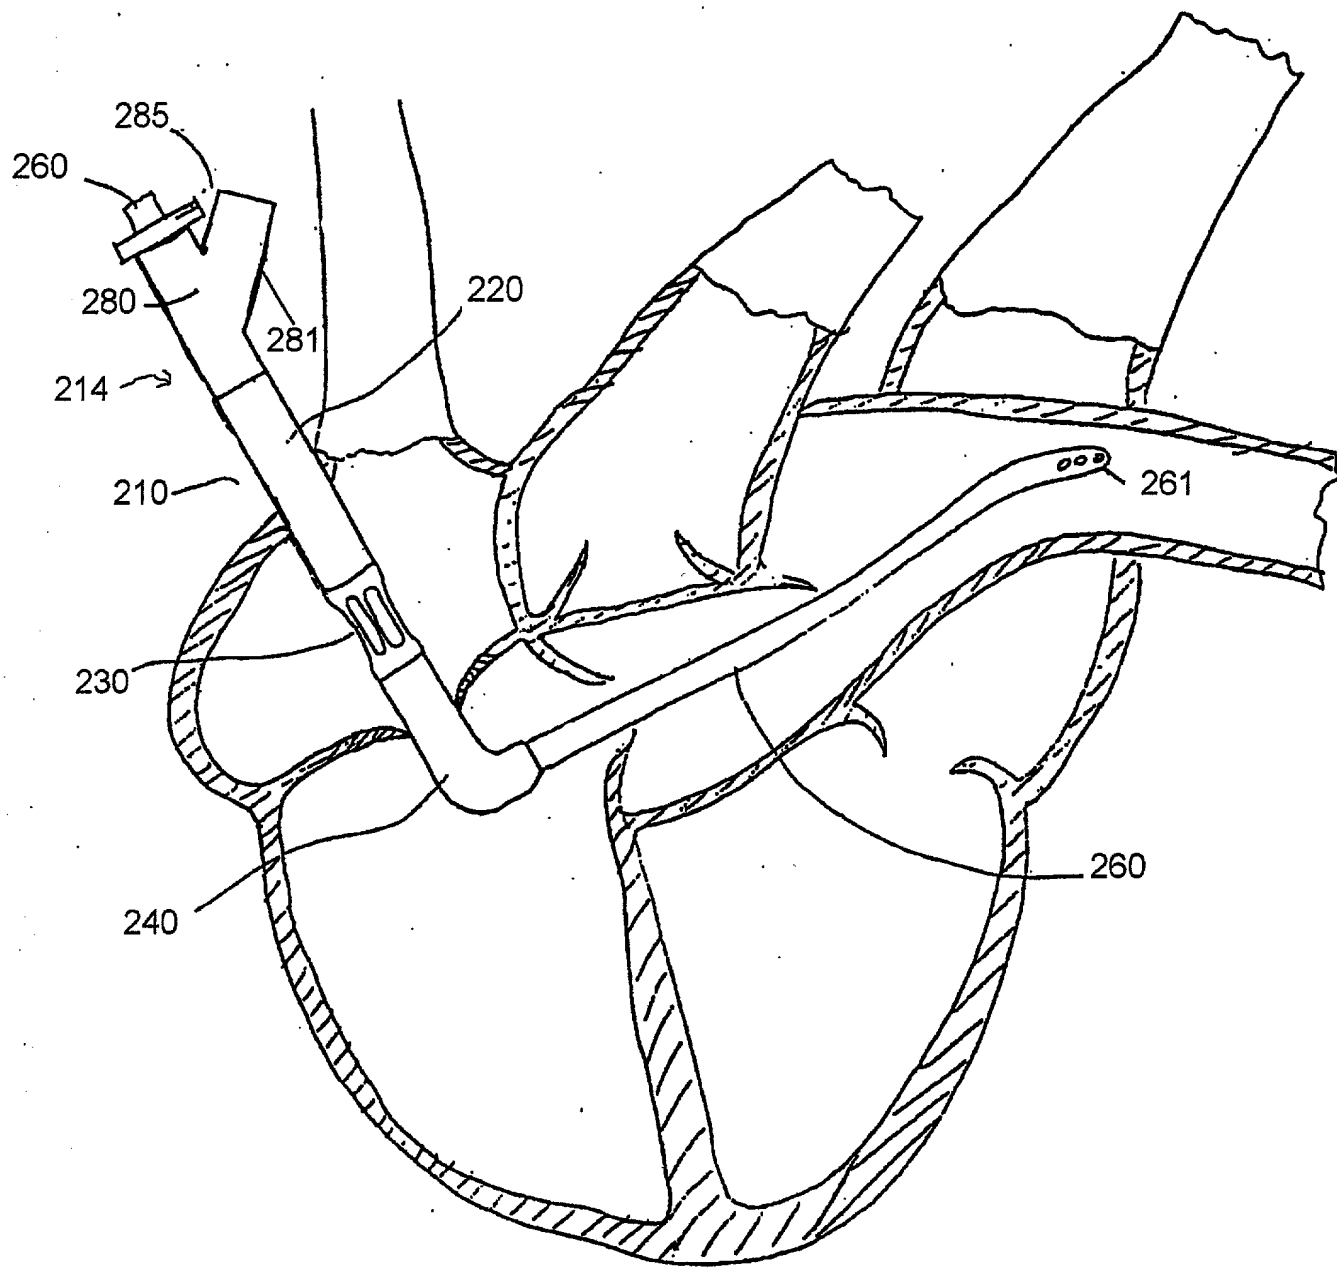


FIGURE 23

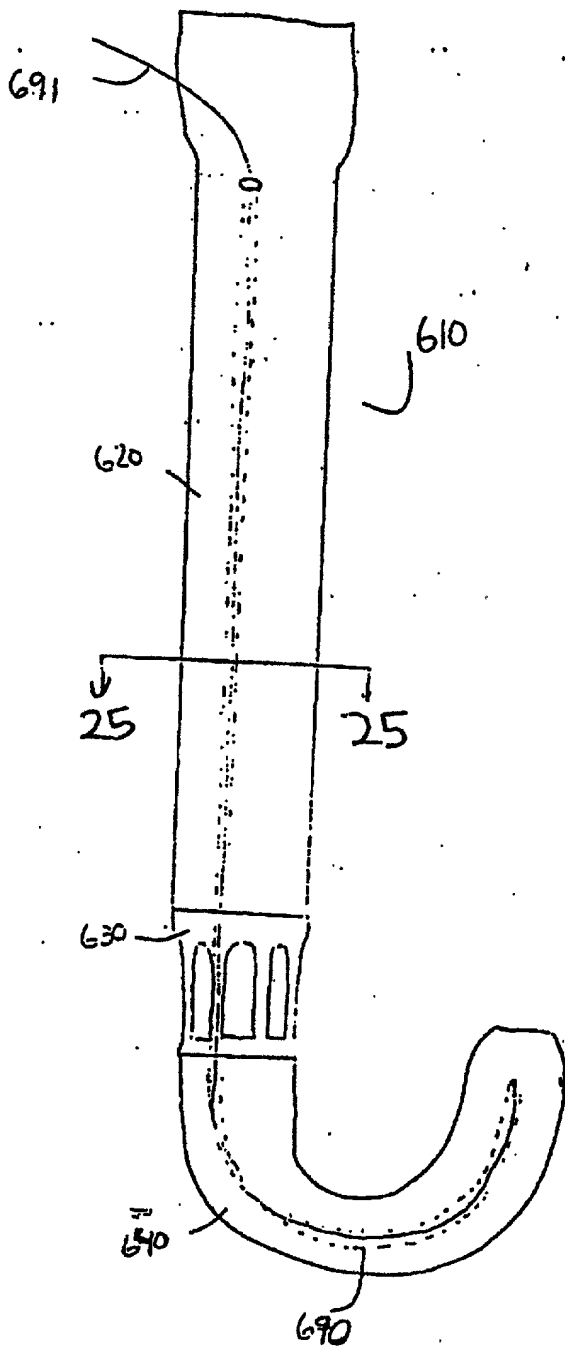


Figure 24

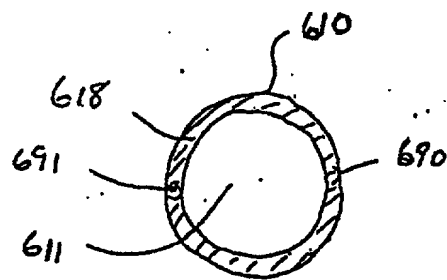


Figure 25

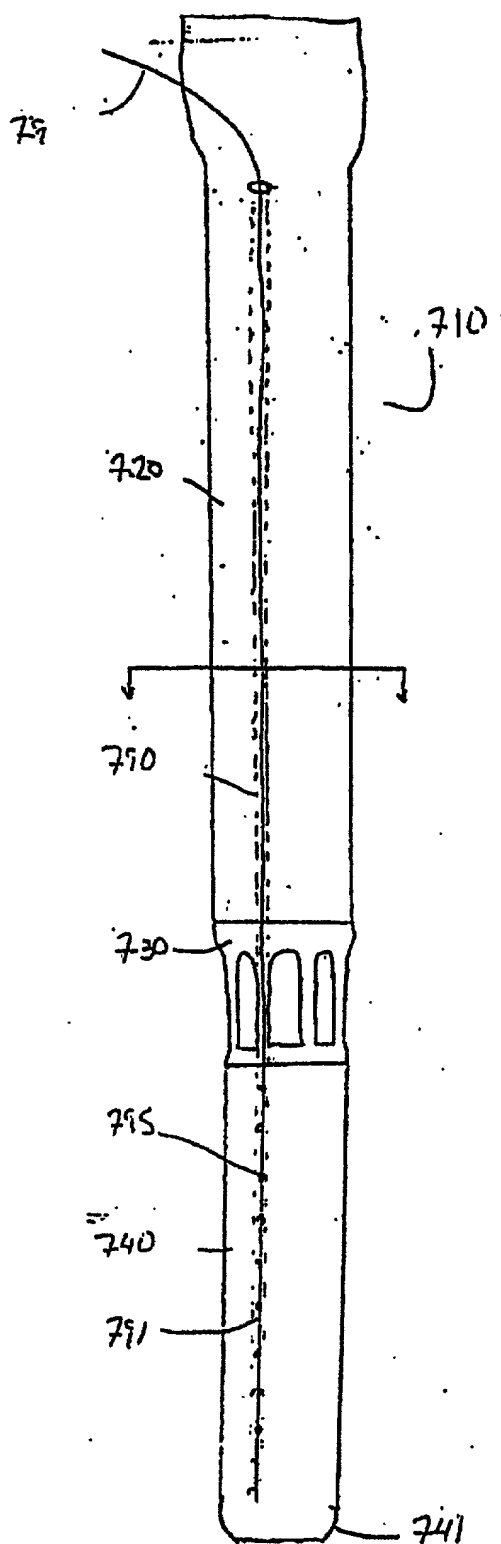


Figure 26

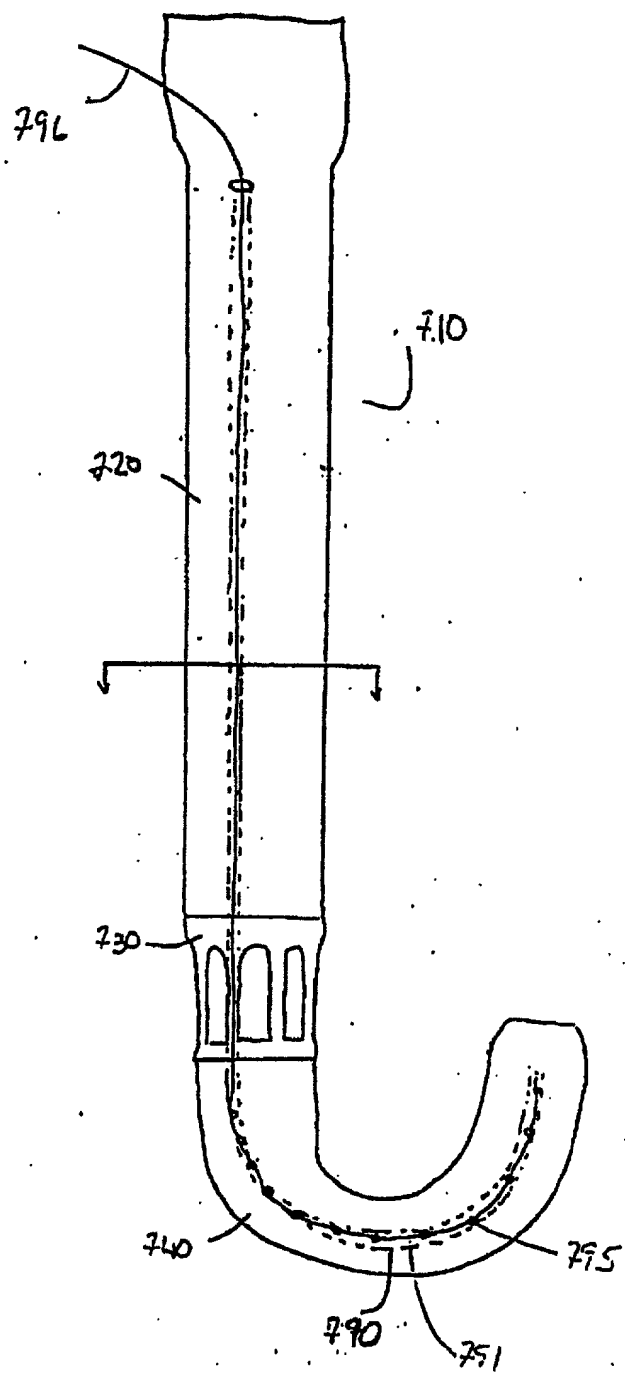
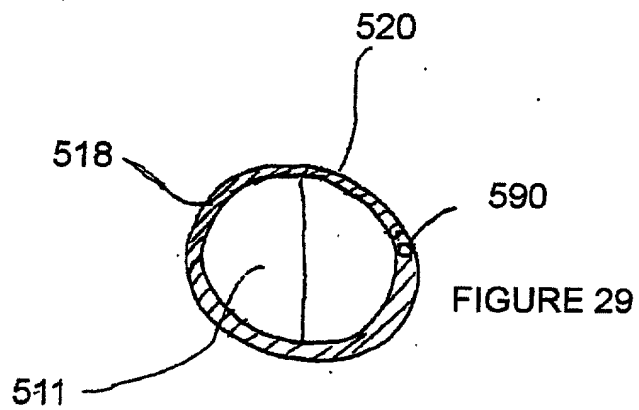
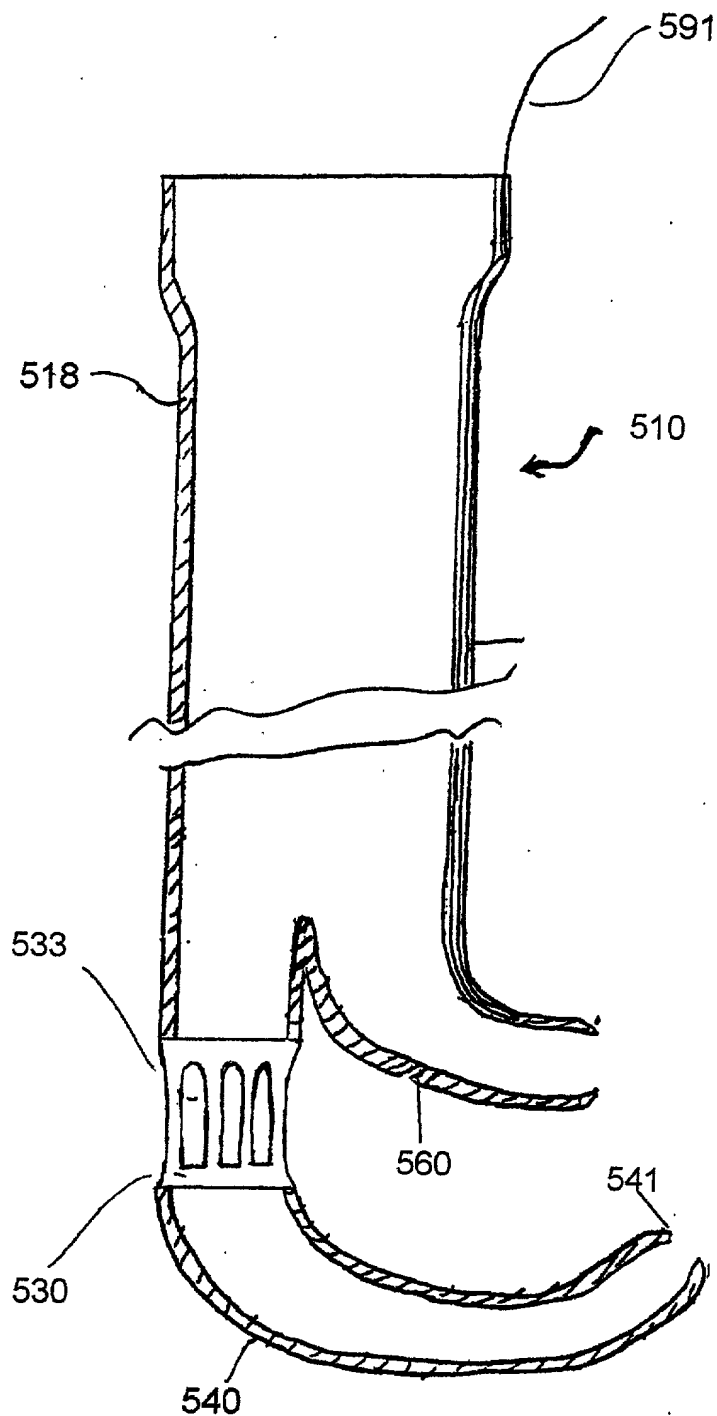
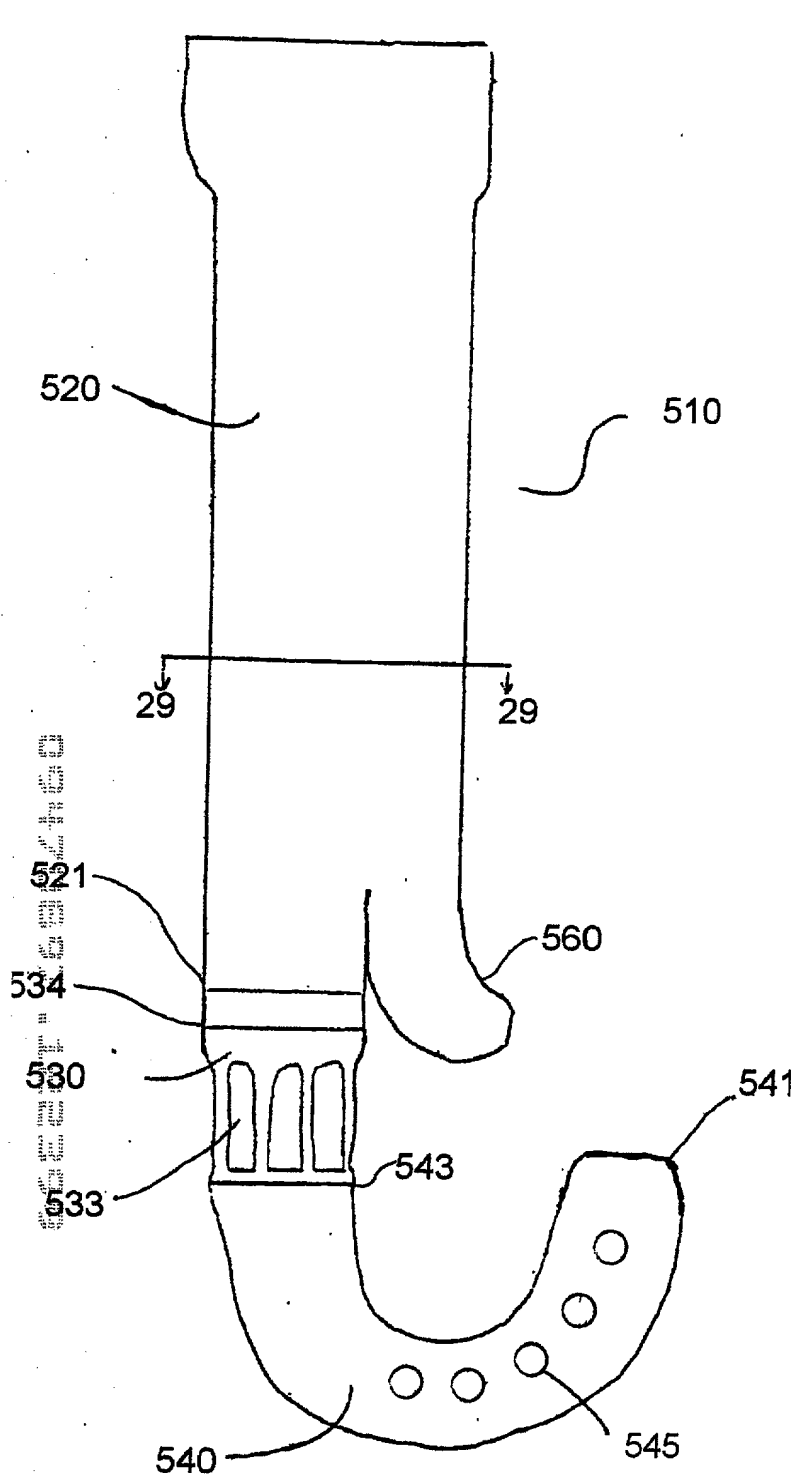


Figure 27



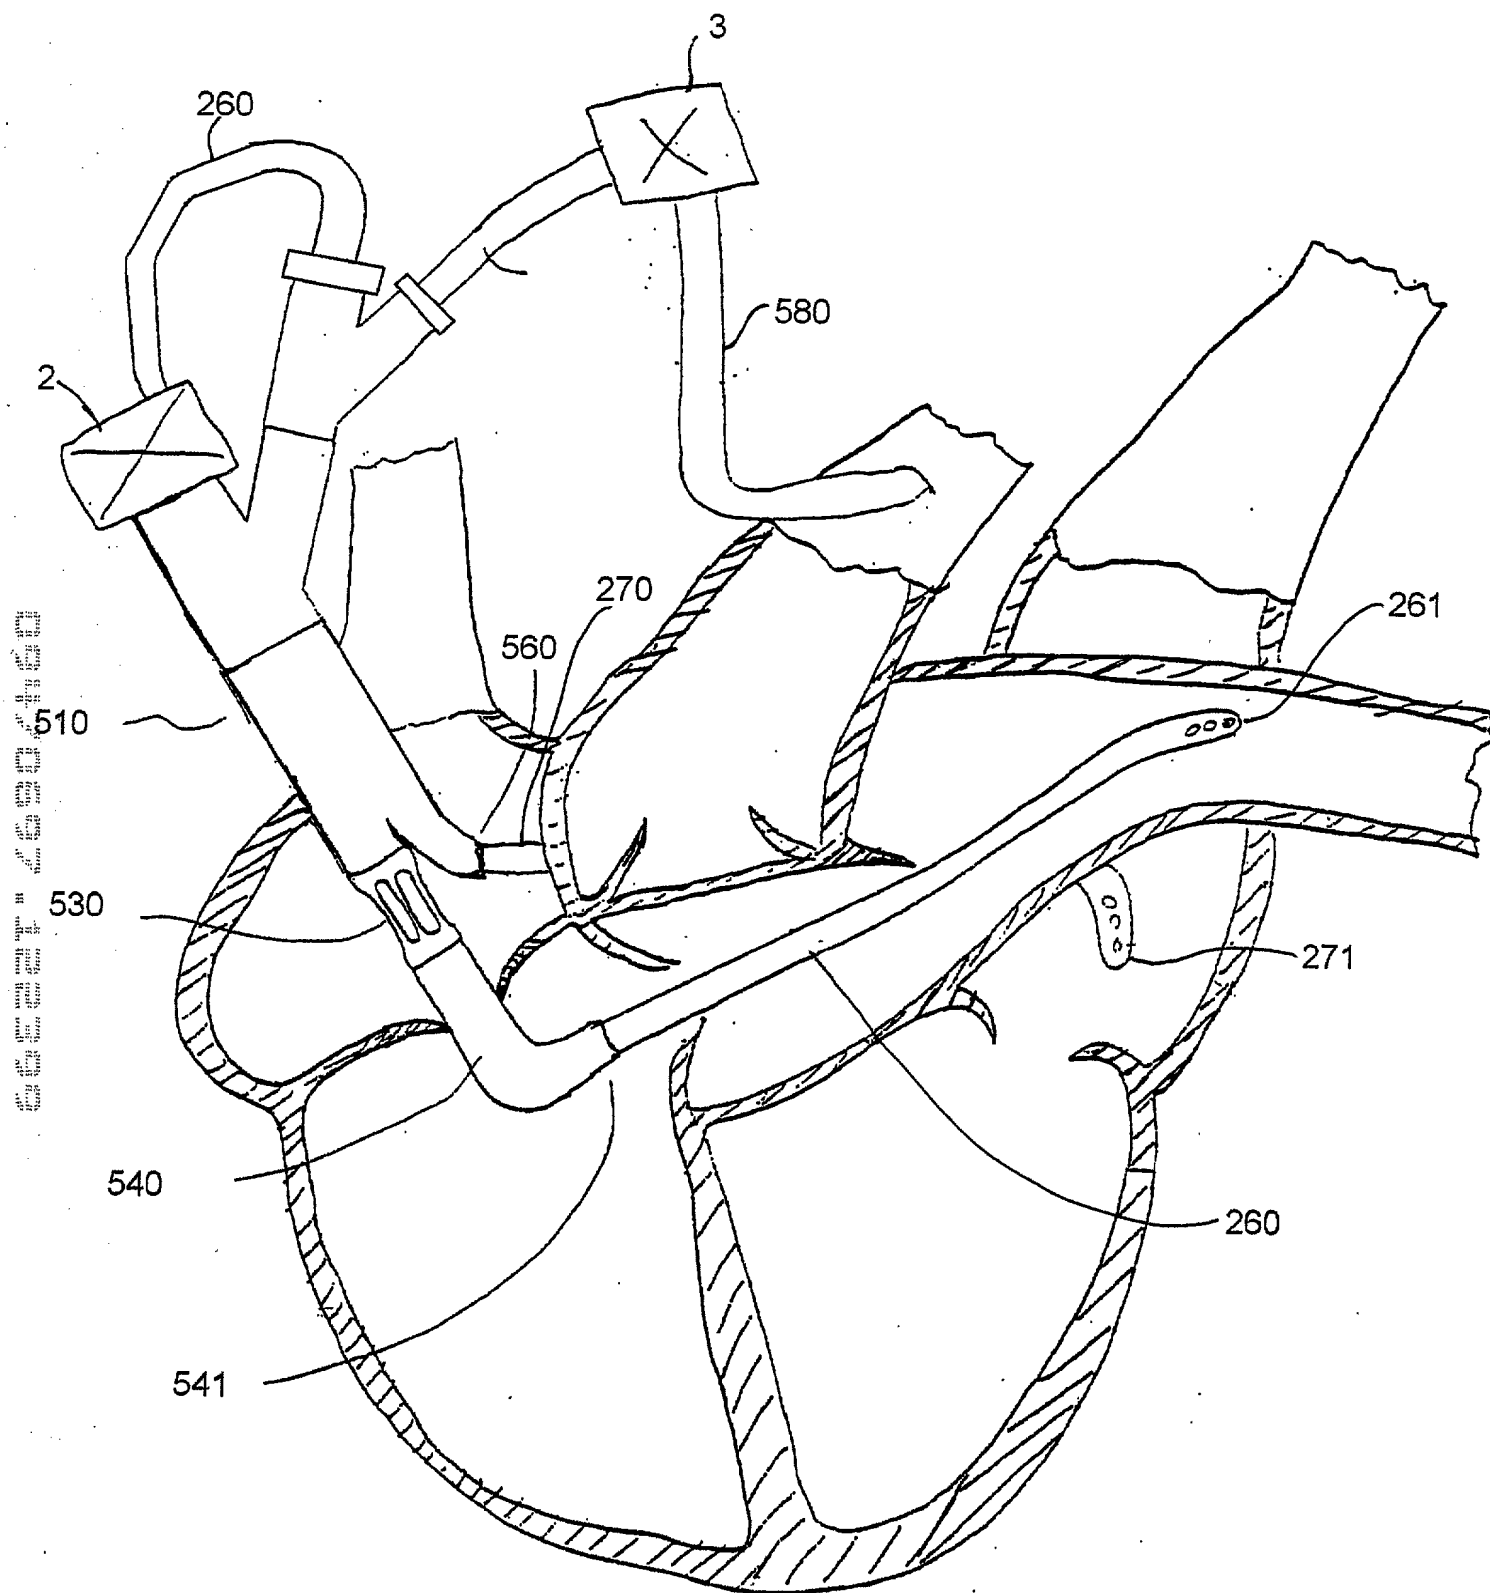


FIGURE 31